



**12 Volt 6 Amp**

**UNIVERSAL**  
12 Volt Battery Charger

**PRO SERIES SMART 9-STAGE BATTERY CHARGER & MAINTAINER**

The OC-PRO600 Oz Charge Battery Charger & Maintainer has been designed in Australia specifically to suit all conventional lead-acid type batteries (Gel, AGM, Wet & Calcium).

The new 9-Stage charging process allows for seamless performance and true reliability and can be left on 24/7 to ensure your battery is always maintained and left fully charged.

Fully automatic, this powerful little unit also contains a patented rejuvenation and equalisation stage to Extend the Life of your Battery and if that wasn't all, it allows you to select different battery types and charge rates. It also boasts a low power consumption mode.

Oz Charge Battery Chargers are the ECO friendly choice!



**OC-BMSOC-12V**  
State of Charge Indicator



**SMART CHARGE**  
AUTOMATIC REJUVENATION



**SAFETY TIMERS**  
PREVENTS OVERCHARGING



**MULTI STAGE**  
FOR MAXIMUM BATTERY LIFE



**UNIVERSAL**  
AGM, GEL, WET & CALCIUM



**ADJUSTABLE**  
SELECTABLE BATTERY TYPE



**MULTI PURPOSE**  
SELECTABLE OUTPUT

**INCLUDES OC-BMSOC -12V**  
**State of Charge Indicator**  
Easy to use 12V state of charge indicator to determine whether your battery needs charging.




**ECO MODE**  
ULTRA LOW POWER CONSUMPTION AND ENERGY SAVING MODE



**REVERSE POLARITY & SHORT CIRCUIT PROTECTION**

**Model: OC-PRO600 - 12 Volt 6 Amp FEATURES AND SPECIFICATIONS**

Input	100-240VAC 50/60Hz	Electrical compliance	AS/NZS 60335.2.29
Power Consumption (Max)	1.4A (95W)	EMC compliance	AS/NZS CISPR 14.1
Output voltage	12V nominal	Safety timers	Yes
Output current (Selectable)	1A / 4A / 6A	Battery types supported	VRLA (all AGM, Calcium, Gel, SMF & WET)
Boost charge voltage	14.1V / 14.4V / 14.7V	Display	LED
Float trickle charge voltage	13.6V	Connections	Crocodile Clips/Ring Terminal
Cooling fan (6A output only)	Yes	Warranty	2 Years
Eco Mode	Yes	Nationwide support	Yes
Short circuit protected	Yes	Weight	750g (approx.)
Reverse polarity protected	Yes	Dimensions (LxWxH)	182 (L) x 88 (W) x 48 (H) mm

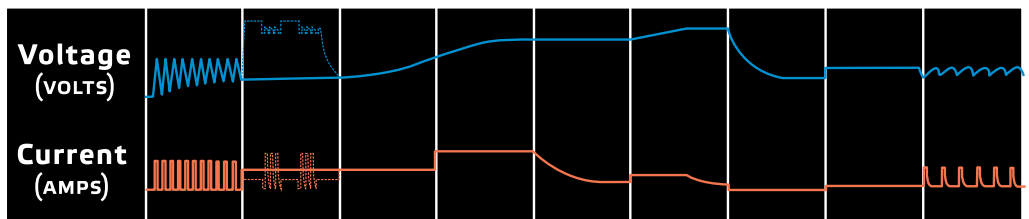

**CHARGING / MAINTAINING PROCESS**

QUALIFICATION	REJUVENATION	SOFT START	BULK CHARGE	ABSORPTION	EQUALISATION	ANALYSIS	FLOAT	MAINTENANCE
Checks battery condition to determine whether the rejuvenation stage or charge cycle is required.	Automatic stage for batteries in poor condition. Breaks down sulphation using a patented high frequency pulse.	Increases your battery life by gently starting to charge the battery until the battery reaches a set voltage.	Reduces charging time by delivering maximum charge until the battery reaches a set voltage.	Uses constant voltage and ensures the battery receives a full charge without overcharging the battery.	Restores full capacity to batteries by removing acid stratification.	Checks the battery condition to ensure it's fully charged.	Maintains the battery at 100% charge.	Special pulse charge for long-term maintenance to ensure the battery is in optimal condition.

**2 YEAR NATIONWIDE CHANGE OVER WARRANTY PROGRAM**  
THROUGHOUT AUSTRALIA & NEW ZEALAND

[www.ozcharge.com.au](http://www.ozcharge.com.au)

**3 Ah**

**Ideal for Charging**

**120 Ah**

**Ideal for Maintaining only**

**180 Ah**



**EXTEND THE LIFE OF YOUR BATTERY**