



12 Volt 12 Amp

UNIVERSAL
12 Volt Battery Charger

PRO SERIES SMART 9-STAGE BATTERY CHARGER & MAINTAINER

The OC-PRO1200 Oz Charge Battery Charger & Maintainer has been designed in Australia specifically to suit all conventional lead-acid type batteries (Gel, AGM, Wet & Calcium).

The new 9-Stage charging process allows for seamless performance and true reliability and can be left on 24/7 to ensure your battery is always maintained and left fully charged.

Fully automatic, this powerful little unit also contains a patented rejuvenation and equalisation stage to Extend the Life of your Battery and if that wasn't all, it allows you to select different battery types and charge rates. It also boasts a low power consumption mode.

Oz Charge Battery Chargers are the ECO friendly choice!



OC-BMSOC-12V
State of Charge Indicator



SMART CHARGE
AUTOMATIC REJUVENATION



SAFETY TIMERS
PREVENTS OVERCHARGING



MULTI STAGE
FOR MAXIMUM BATTERY LIFE



UNIVERSAL
AGM, GEL, WET & CALCIUM



ADJUSTABLE
SELECTABLE BATTERY TYPE



MULTI PURPOSE
SELECTABLE OUTPUT

INCLUDES OC-BMSOC -12V
State of Charge Indicator
Easy to use 12V state of charge indicator to determine whether your battery needs charging.




ECO MODE
ULTRA LOW POWER CONSUMPTION AND ENERGY SAVING MODE



REVERSE POLARITY & SHORT CIRCUIT PROTECTION

Model: OC-PRO1200 - 12 Volt 12 Amp FEATURES AND SPECIFICATIONS

Input	240VAC 50Hz	Electrical compliance	AS/NZS 60335.2.29
Power Consumption (Max)	1.8A (175W)	EMC compliance	AS/NZS CISPR 14.1
Output voltage	12V nominal	Safety timers	Yes
Output current (Selectable)	1A / 8A / 12A	Battery types supported	VRLA (all AGM, Calcium, Gel, SMF & WET)
Boost charge voltage	14.1V / 14.4V / 14.7V	Display	LED
Float trickle charge voltage	13.6V	Connections	Crocodile Clips / Ring Terminals
Cooling fan (12A output only)	Yes	Warranty	2 years
Eco Mode	Yes	Nationwide support	Yes
Short circuit protected	Yes	Weight	1100g (approx.)
Reverse polarity protected	Yes	Dimensions (LxWxH)	214 (L) x 103 (W) x 55 (H) mm

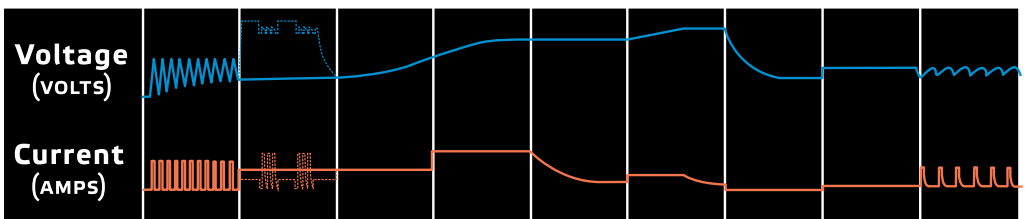

CHARGING / MAINTAINING PROCESS

QUALIFICATION	REJUVENATION	SOFT START	BULK CHARGE	ABSORPTION	EQUALISATION	ANALYSIS	FLOAT	MAINTENANCE
Checks battery condition to determine whether the rejuvenation stage or charge cycle is required.	Automatic stage for batteries in poor condition. Breaks down sulphation using a patented high frequency pulse.	Increases your battery life by gently starting to charge the battery until the battery reaches a set voltage.	Reduces charging time by delivering maximum charge until the battery reaches a set voltage.	Uses constant voltage and ensures the battery receives a full charge without overcharging the battery.	Restores full capacity to batteries by removing acid stratification.	Checks the battery condition to ensure it's fully charged.	Maintains the battery at 100% charge.	Special pulse charge for long-term maintenance to ensure the battery is in optimal condition.

2 YEAR NATIONWIDE CHANGE OVER WARRANTY PROGRAM
THROUGHOUT AUSTRALIA & NEW ZEALAND

www.ozcharge.com.au

3 Ah

Ideal for Charging

240 Ah

Ideal for Maintaining only

360 Ah



EXTEND THE LIFE OF YOUR BATTERY