

### SMART 9-STAGE BATTERY CHARGER & MAINTAINER

The OC1225U Oz Charge Battery Charger, Maintainer & Power Supply has been designed in Australia specifically to suit all conventional lead-acid type batteries (Gel, AGM, Wet & Calcium). The new 9-Stage charging process allows for seamless performance and true reliability and can be left on 24/7 to ensure your battery is always maintained and left fully charged.

Fully automatic, this powerful little unit also contains a patented rejuvenation and equalisation stage to Extend the Life of your Battery and if that wasn't all, it allows you to select different battery types, charge rates or Power Supply Mode. It also boasts a low power consumption mode.



Optional wired remote display: Model: OC-RDP



**SMART CHARGE**  
AUTOMATIC REJUVENATION



**SAFETY TIMERS**  
PREVENTS OVERCHARGING



**MULTI STAGE**  
FOR MAXIMUM BATTERY LIFE



**UNIVERSAL**  
AGM, GEL, WET & CALCIUM



**ADJUSTABLE**  
SELECTABLE BATTERY TYPE



**MULTI PURPOSE**  
SELECTABLE OUTPUT



**POWER SUPPLY MODE**  
SELECTABLE




**ECO MODE**  
ULTRA LOW POWER CONSUMPTION AND ENERGY SAVING MODE



**REVERSE POLARITY & SHORT CIRCUIT PROTECTION**

### Model: OC1225U - 12 Volt 25 Amp FEATURES AND SPECIFICATIONS

Input	240VAC 50Hz	Electrical compliance	AS/NZS 60335.2.29
Power Consumption (Max)	3A	EMC compliance	AS/NZS CISPR 14.1
Output voltage	12V nominal	Safety timers	Yes
Output current (Selectable)	2A / 15A / 25A	Battery types supported	VRLA (all AGM, Calcium, Gel, SMF & WET)
Boost charge voltage	14.1V / 14.4V / 14.7V	Display	LED
Float trickle charge voltage	13.6V	Connections	Crocodile Clips / Ring Terminals
Cooling fan (25A output only)	Yes	Warranty	2 years
Eco Mode	Yes	Nationwide support	Yes
Short circuit protected	Yes	Weight	1100g (approx.)
Reverse polarity protected	Yes	Dimensions (LxWxH)	214 (L) x 103 (W) x 55 (H) mm

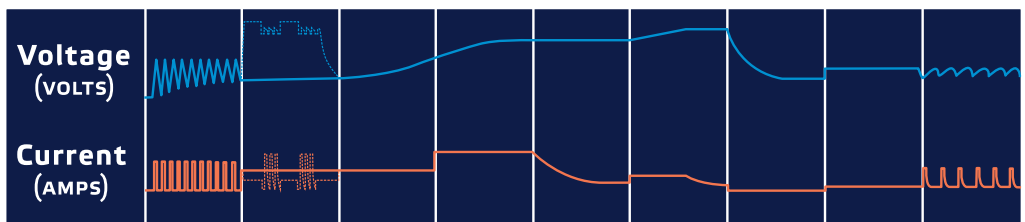

### CHARGING / MAINTAINING PROCESS

QUALIFICATION	REJUVENATION	SOFT START	BULK CHARGE	ABSORPTION	EQUALISATION	ANALYSIS	FLOAT	MAINTENANCE
Checks battery condition to determine whether the rejuvenation stage or charge cycle is required.	Automatic stage for batteries in poor condition. Breaks down sulphation using a patented high frequency pulse.	Increases your battery life by gently starting to charge the battery until the battery reaches a set voltage.	Reduces charging time by delivering maximum charge until the battery reaches a set voltage.	Uses constant voltage and ensures the battery receives a full charge without overcharging the battery.	Restores full capacity to batteries by removing acid stratification.	Checks the battery condition to ensure it's fully charged.	Maintains the battery at 100% charge.	Special pulse charge for long-term maintenance to ensure the battery is in optimal condition.

**2 YEAR NATIONWIDE CHANGE OVER WARRANTY PROGRAM**  
THROUGHOUT AUSTRALIA & NEW ZEALAND

[www.ozcharge.com.au](http://www.ozcharge.com.au)

**15 Ah**

**Ideal for Charging**

**500 Ah**

**Ideal for Maintaining only**

**750 Ah**

## EXTEND THE LIFE OF YOUR BATTERY

